


**The largest selection for the construction industry!**

**BOND-SEAL SEALING WASHER**

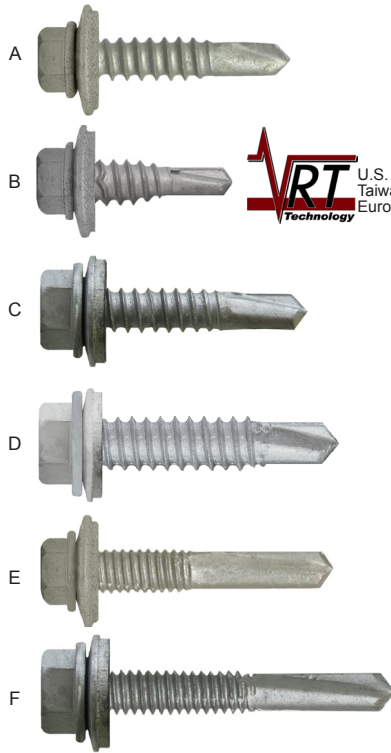

U.S. Pat. No. 8,360,701  
Taiwan Pat No. I50140  
Europe Pat No. 2286067

Blue colored sizes denotes popular DC items

**HEAD TYPE**  
#12 dia: 5/16" HWH  
1/4" Dia: 3/8" HWH  
\*1/4 dia: 5/16" & 3/8"HWH  
5/16 dia: 3/8" HWH

**WASHER DETAILS**  
20 ga G-90 Galvanized Steel  
Vulcanized to .062" thick  
non-conductive EPDM  
15MM OD Washer

Special sizes available upon request.

**MATERIAL:** C1018-1022 Carbon Steel  
**PLATING:** TRI-SEAL® Coating (1,000hrs Salt Spray - ASTM B117). Exceeds ASTM B633 and F1941 Standards  
**Dimensions:** Meets or exceeds SAE J78 Standards

**Proper Fastener Installation**



To assure a proper seal, torque the fastener until the EPDM sealant extrudes to the outer edge of the backing material.


- BOND-SEALER™ is a sealing washer that has EPDM vulcanized to a 20 Gauge galvanized backing that will withstand harsh weather conditions.
- TRI-SEAL® long life coated for superior corrosion protection.

**SIZES AND PERFORMANCE SPECIFICATIONS**

Diameter   Length	Attachment Thickness (Max)	Box Qty	Point Type	Drilling Thickness	
A #12-14 x	3/4"	.125"	5M	BLAZER 2	.036" .210"
	1"	.250"	3.5M		
	1-1/4"	.625"	3M		
	1-1/2"	.750"	2M		
	2"	1.25"	2M		
	2-1/2"	1.75"	1M		
B 1/4-14 x	*7/8" VRT	.325"	2.5M	BLAZER 1/VRT	.036" .090"
	C 1/4-14 x	3/4"	.125"	2.5M	BLAZER 3
*1"		.250"	2.5M		
*1-1/4"		.625"	2M		
1-1/2"		.875"	2M		
2"		1"	1.5M		
2-1/2"		1.50"	1M		
3"		2"	1M		
4"		3"	500		
5"		4"	500		
6"		2" - 5"	250		
D 5/16-12 x	1"	.250"	1.5M	BLAZER 3	.036" .210"
	1-1/2"	.875"	1M		
	3"	2.25"	750		
	4"	3.25"	500		
	8"	2.50 - 5"	500		
E #12-24 x	1-1/4"	.500"	3M	BLAZER 5	.125" .500"
	1-1/2"	.625"	2M		
	2"	.750"	3M		
F 1/4-20 x	1-1/2"	.500"	2M	BLAZER 5	.200" .500"
	2-1/4"	1.250"	1M		
	3"	2"	500		
	4"	3"	250		
	5"	4"	250		
	6"	2.50" - 5"	250		
	8"	4.25" - 7"	150		

**FLANGE-SEAL HEAD with EPDM WASHER**

- FLANGE-SEAL™ self-sealing fastener has a deep undercut head that entraps the EPDM sealing washer to assure a leak free seal.
- TRI-SEAL® long-life coated for superior corrosion protection.

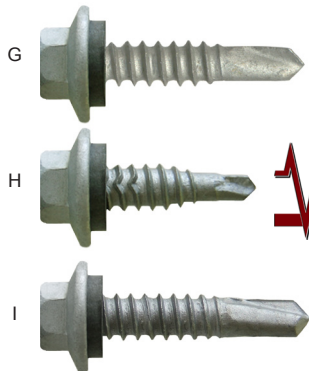

**WASHER DETAILS**  
.125" Thick EPDM  
Non-conductive

**HEAD TYPE**  
5/16" HWH with Flange Undercut

Blue colored sizes denotes popular DC items

**SIZES AND PERFORMANCE SPECIFICATIONS**

Diameter   Length	Attachment Thickness (Max)	Box Qty	Point Type	Drilling Thickness	
G #12-14 x	1"	.250"	3.5M	BLAZER 2/3	.036" .210"
	1-1/4"	.500"	3M		
	1-1/2"	.750"	2M		
	2"	1"	2M		
	2-1/2"	1.5"	1.5M		
H 1/4-14 x	7/8" VRT	.325"	2.5M	BLAZER 1/VRT	.036" .090"
	I 1/4-14 x	1"	.250"	2.5M	BLAZER 3
1-1/4"		.500"	2.5M		
1-1/2"		.750"	2M		
2"		1.25"	1.5M		

**MATERIAL:** C1018-1022 Carbon Steel  
**PLATING:** TRI-SEAL® Coating (1,000hrs Salt Spray - ASTM B117). Exceeds ASTM B633 and F1941 Standards  
**Dimensions:** Meets or exceeds SAE J78 Standards