


The largest selection for the construction industry!

BOND-SEAL SEALING WASHER

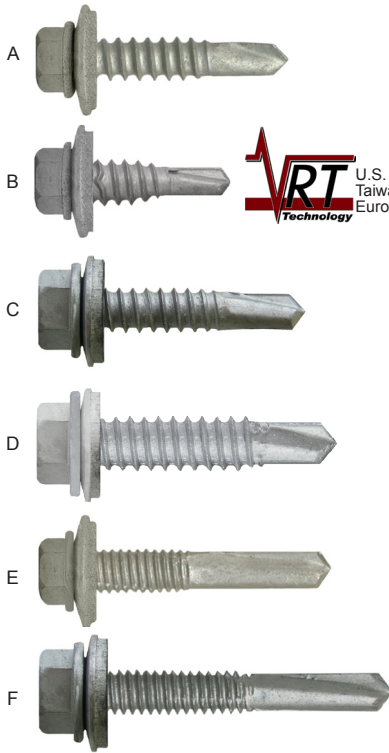

U.S. Pat. No. 8,360,701
Taiwan Pat No. I50140
Europe Pat No. 2286067

Blue colored sizes denotes popular DC items

HEAD TYPE

#12 dia: 5/16" HWH
1/4" Dia: 3/8" HWH
*1/4 dia: 5/16" & 3/8" HWH
5/16 dia: 3/8" HWH

WASHER DETAILS

20 ga G-90 Galvanized Steel
Vulcanized to .062" thick
non-conductive EPDM
15MM OD Washer

Special sizes available upon request.

MATERIAL: C1018-1022 Carbon Steel
PLATING: TRI-SEAL® Coating (1,000hrs Salt Spray - ASTM B117). Exceeds ASTM B633 and F1941 Standards
Dimensions: Meets or exceeds SAE J78 Standards

Proper Fastener Installation



To assure a proper seal, torque the fastener until the EPDM sealant extrudes to the outer edge of the backing material.


- BOND-SEALER™ is a sealing washer that has EPDM vulcanized to a 20 Gauge galvanized backing that will withstand harsh weather conditions.
- TRI-SEAL® long life coated for superior corrosion protection.

SIZES AND PERFORMANCE SPECIFICATIONS

Diameter Length	Load Bearing Length (Max)	Box Qty	Point Type	Drilling Thickness
A #12-14 x	3/4"	.125"	5M	BLAZER 2 .036" .210"
	1"	.250"	3.5M	
	1-1/4"	.625"	3M	
	1-1/2"	.750"	2M	
	2"	1.25"	2M	
	2-1/2"	1.75"	1M	
B 1/4-14 x	*7/8" VRT	.325"	2.5M	BLAZER 1/VRT .036" .090"
	3/4"	.125"	2.5M	
	*1"	.250"	2.5M	
	*1-1/4"	.625"	2M	
	1-1/2"	.875"	2M	
	2"	1"	1.5M	
C 1/4-14 x	2-1/2"	1.50"	1M	BLAZER 3 .036" .250"
	3"	2"	1M	
	4"	3"	500	
	5"	4"	500	
	6"	2" - 5"	250	
	8"	4" - 7"	250	
	10"	6" - 9"	250	
	1"	.250"	1.5M	
	1-1/2"	.875"	1M	
	3"	2.25"	750	
D 5/16-12 x	4"	3.25"	500	BLAZER 3 .036" .210"
	6"	2.50 - 5"	500	
	8"	4.25" - 7"	200	
	1-1/4"	.500"	3M	
	1-1/2"	.625"	2M	
	2"	.750"	3M	
E #12-24 x	1-1/2"	.500"	2M	BLAZER 5 .125" .500"
	2-1/4"	1.250"	1M	
	3-1/8"	2-1/8"	500	
	4"	3"	250	
	5"	4"	250	
	6"	2.50" - 5"	250	
F 1/4-20 x	8"	4.25" - 7"	150	BLAZER 5 .200" .500"
	4"	3"	250	
	5"	4"	250	
	6"	2.50" - 5"	250	
8"	4.25" - 7"	150		

FLANGE-SEAL HEAD with EPDM WASHER

- FLANGE-SEAL™ self-sealing fastener has a deep undercut head that entraps the EPDM sealing washer to assure a leak free seal.
- TRI-SEAL® long-life coated for superior corrosion protection.

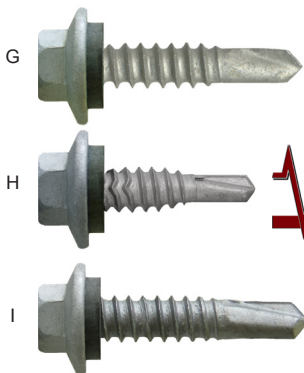

WASHER DETAILS

.125" Thick EPDM
Non-conductive

HEAD TYPE

5/16" HWH with Flange Undercut

Blue colored sizes denotes popular DC items

SIZES AND PERFORMANCE SPECIFICATIONS

Diameter Length	Load Bearing Length (Max)	Box Qty	Point Type	Drilling Thickness
G #12-14 x	1"	.250"	3.5M	BLAZER 2/3 .036" .210"
	1-1/4"	.625"	3M	
	1-1/2"	.750"	2M	
	2"	1.250"	2M	
	2-1/2"	1.5"	1.5M	
	3"	2.25"	1M	
H 1/4-14 x	7/8" VRT	.325"	2.5M	BLAZER 1/VRT .036" .090"
	1"	.250"	2.5M	
I 1/4-14 x	1-1/4"	.625"	2.5M	BLAZER 3 .036" .250"
	1-1/2"	.875"	2M	
	2"	1"	1.5M	
	2"	1"	1.5M	

MATERIAL: C1018-1022 Carbon Steel
PLATING: TRI-SEAL® Coating (1,000hrs Salt Spray - ASTM B117). Exceeds ASTM B633 and F1941 Standards
Dimensions: Meets or exceeds SAE J78 Standards