


The largest selection for the construction industry!

### BOND-SEAL SEALING WASHER

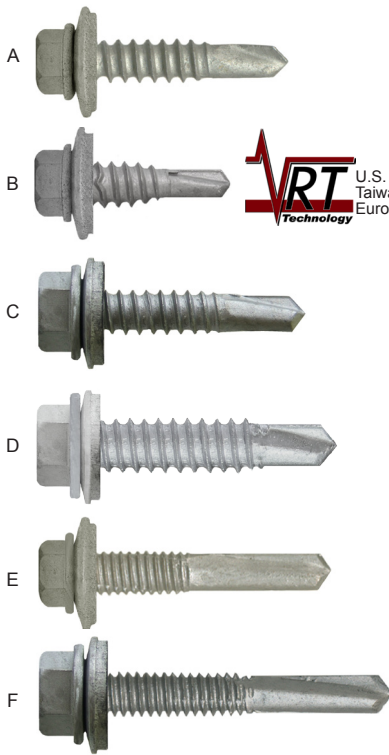

U.S. Pat. No. 8,360,701  
Taiwan Pat No. I50140  
Europe Pat No. 2286067

Blue colored sizes denotes popular DC items

#### HEAD TYPE

#12 dia: 5/16" HWH  
1/4" Dia: 3/8" HWH  
\*1/4 dia: 5/16" & 3/8" HWH  
5/16 dia: 3/8" HWH

#### WASHER DETAILS

20 ga G-90 Galvanized Steel  
Vulcanized to .062" thick  
non-conductive EPDM  
15MM OD Washer

Special sizes available upon request.

**MATERIAL:** C1018-1022 Carbon Steel  
**PLATING:** TRI-SEAL® Coating (1,000hrs Salt Spray - ASTM B117). Exceeds ASTM B633 and F1941 Standards  
**Dimensions:** Meets or exceeds SAE J78 Standards

#### Proper Fastener Installation



To assure a proper seal, torque the fastener until the EPDM sealant extrudes to the outer edge of the backing material.


- BOND-SEALER™ is a sealing washer that has EPDM vulcanized to a 20 Gauge galvanized backing that will withstand harsh weather conditions.
- TRI-SEAL® long life coated for superior corrosion protection.

#### SIZES AND PERFORMANCE SPECIFICATIONS

Diameter   Length	Load Bearing Length (Max)	Box Qty	Point Type	Drilling Thickness	
A #12-14 x	3/4"	.125"	5M	BLAZER 2	.036" .210"
	1"	.250"	3.5M		
	1-1/4"	.625"	3M		
	1-1/2"	.750"	2M		
	2"	1.25"	2M		
	2-1/2"	1.75"	1M		
B 1/4-14 x	*7/8" VRT	.325"	2.5M	BLAZER 1/VRT	.036" .090"
	3/4"	.125"	2.5M	BLAZER 3	.036" .250"
	*1"	.250"	2.5M		
	*1-1/4"	.625"	2M		
	1-1/2"	.875"	2M		
	2"	1"	1.5M		
2-1/2"	1.50"	1M			
C 1/4-14 x	3"	2"	1M	BLAZER 3	.036" .250"
	4"	3"	500		
	5"	4"	500		
	6"	2" - 5"	250		
	8"	4" - 7"	250		
	10"	6" - 9"	250		
D 5/16-12 x	1"	.250"	1.5M	BLAZER 3	.036" .210"
	1-1/2"	.875"	1M		
	3"	2.25"	750		
	4"	3.25"	500		
	6"	2.50 - 5"	500		
	8"	4.25" - 7"	200		
E #12-24 x	1-1/4"	.500"	3M	BLAZER 5	.125" .500"
	1-1/2"	.625"	2M		
	2"	.750"	3M		
F 1/4-20 x	1-1/2"	.500"	2M	BLAZER 5	.200" .500"
	2-1/4"	1.250"	1M		
	3-1/8"	2-1/8"	500		
	4"	3"	250		
	5"	4"	250		
	6"	2.50" - 5"	250		
8"	4.25" - 7"	150			

### FLANGE-SEAL HEAD with EPDM WASHER

- FLANGE-SEAL™ self-sealing fastener has a deep undercut head that entraps the EPDM sealing washer to assure a leak free seal.
- TRI-SEAL® long-life coated for superior corrosion protection.

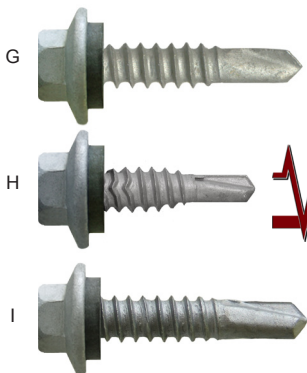

#### WASHER DETAILS

.125" Thick EPDM  
Non-conductive

#### HEAD TYPE

5/16" HWH with Flange Undercut

Blue colored sizes denotes popular DC items

#### SIZES AND PERFORMANCE SPECIFICATIONS

Diameter   Length	Load Bearing Length (Max)	Box Qty	Point Type	Drilling Thickness	
G #12-14 x	1"	.250"	3.5M	BLAZER 2/3	.036" .210"
	1-1/4"	.625"	3M		
	1-1/2"	.750"	2M		
	2"	1.250"	2M		
	2-1/2"	1.5"	1.5M		
	3"	2.25"	1M		
H 1/4-14 x	7/8" VRT	.325"	2.5M	BLAZER 1/VRT	.036" .090"
	1"	.250"	2.5M	BLAZER 3	.036" .250"
1-1/4"	.625"	2.5M			
1-1/2"	.875"	2M			
2"	1"	1.5M			

**MATERIAL:** C1018-1022 Carbon Steel  
**PLATING:** TRI-SEAL® Coating (1,000hrs Salt Spray - ASTM B117). Exceeds ASTM B633 and F1941 Standards  
**Dimensions:** Meets or exceeds SAE J78 Standards