


WOOD OR THIN METAL

Piercing Capacity: CS & 410SS <=20 ga

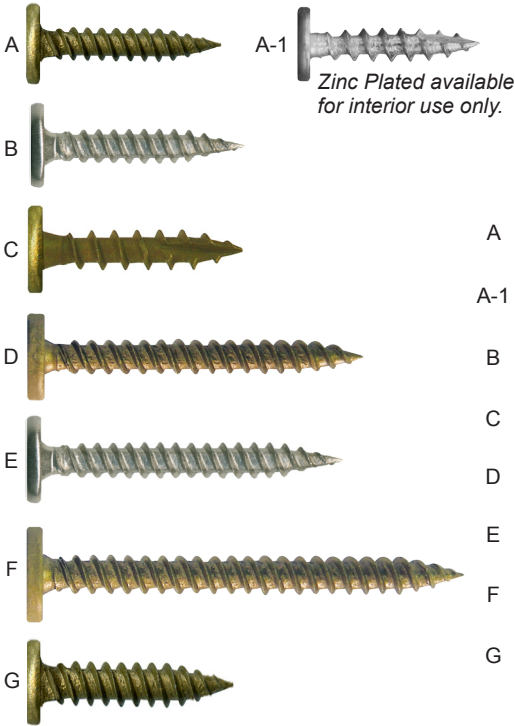


#10, #12, & 1/4" PIERCING POINTS AND DRILL POINTS

CONCEALOR® low profile head fasteners are engineered to perform in a variety of applications. They are specified in many metal roofing systems to attached SSR clips to metal or wood. They are easy to install and provides optimal strength.


Sizes

	Description	Load Bearing Length (Max)	Part Number	Box Quantity	WT Per Box
A	#10-13 X 1" GP Long-life TRI-SEAL® coated	1"	10100SPCGCSTS	5,000 pcs	36.0 lbs.
A-1	#10-9 X 1" Type 17 Zinc Plated Interior Use Only	1"	10100SPC17CSTS ZP	5,000 pcs	36.0 lbs.
B	#10-13 X 1" GP 302 Stainless Steel	1"	10100SPCGS3	5,000 pcs	39.0 lbs.
C	#10-9 X 1-1/8" TYPE 17 Long-life TRI-SEAL® coated	1-1/8"	10112SPC17CSTS	5,000 pcs	40.0 lbs.
D	#10-13 X 1-1/2" GP Long-life TRI-SEAL® coated	1-1/2"	10150SPCGCSTS	3,000 pcs	31.0 lbs.
E	#10-13 X 1-1/2" GP 302 Stainless Steel	1-1/2"	10150SPCGS3	3,000 pcs	32 lbs.
F	#10-13 X 2" GP Long-life TRI-SEAL® coated	2"	10200SPCGCSTS	1,500 pcs	19.0 lbs.
G	#12-11 X 1" GP Long-life TRI-SEAL® coated	1"	12100SPCGCSTS	5,000 pcs	44.0 lbs.
H	#10-16 X 5/8" DP3 .0003" Zinc and Yellow	.125"	10062SPC3CS	5,000 pcs	27.0 lbs.
I	#10-24 X 5/8" DP3 .0003" Zinc and Yellow	.125"	10062PPC3CSYZ	5,000 pcs	27.0 lbs.
J	#10-16 X 1" DP3 Long-Life TRI-SEAL® coated	.500"	10100SPC3CSTS	5,000 pcs	37.0 lbs.
K	#10-16 X 1" DP3 410 Stainless Steel	.500"	10100SPC3S4	5,000 pcs	37.0 lbs.
L	#10-16 X 1-1/2" DP3 Long-Life TRI-SEAL® coated	1"	10150SPC3CSTS	3,000 pcs	32.0 lbs.
M	#10-16 X 2" DP3 Long-Life TRI-SEAL® coated	1.5"	10200SPC3CSTS	1,500 pcs	21.0 lbs.
N	#12-14 X 1" DP3 Long-Life TRI-SEAL® coated	.375"	12100SPC3CSTS	5,000 pcs	43.0 lbs.
O	#12-24 X 1-1/4" DP5 Long-Life TRI-SEAL® coated	.500"	12125SPC5CSTS	4,000 pcs	52.0 lbs.
	#12-24 X 1-1/2" DP5 Long-Life TRI-SEAL® coated	.625"	12150SPC5CSTS	4,000 pcs	43.8 lbs.
P	1/4-14 X 1" DP3 Long-Life TRI-SEAL® coated	.325"	14100SPC3CS	2,500 pcs	27.0 lbs.

METAL SUBSTRATES

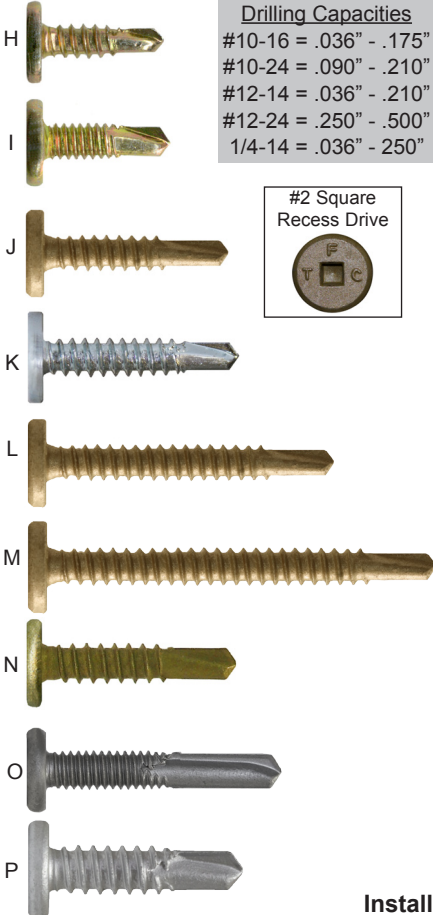

Drilling Capacities
 #10-16 = .036" - .175"
 #10-24 = .090" - .210"
 #12-14 = .036" - .210"
 #12-24 = .250" - .500"
 1/4-14 = .036" - .250"



Bagged 250 pcs. per bag for your convenience!

SPECIAL APPLICATIONS

We can assemble CONCEALOR® with a bonded sealing washer that locks out weather and looks appealing!

We can color match to your exact requirements in three days or less!

Installation: Do not use impact drivers!
 Use 2,500 RPM max variable speed screw drivers with torque control or depth sensing nosepiece.

Army Corps of Engineers