

Choose from the largest selection in the industry!

Designed for fast installation and corrosion free performance. All fasteners can be painted with our Kalida-Kote™ paint finish to your exact color match. Polyurethane with UV protection provides a chip resistant finish without chalking and fading.



PANEL-TITE HIGH-LOW 10®

- Designed to provide ultimate pullout resistance.
- Available with TRI-SEAL® 1,000 hrs salt spray coating which is formulated for ACQ lumber applications.


PANEL-TITE ULTRA 12®

- Designed for fast installation and corrosion free performance.

PANEL-TITE ULTRA 14®

- Assembled with EPDM bonded washer for exceptional weatherability.
- Type 17 mill point eliminates splitting of wood.

Fastener Sizes and Specifications

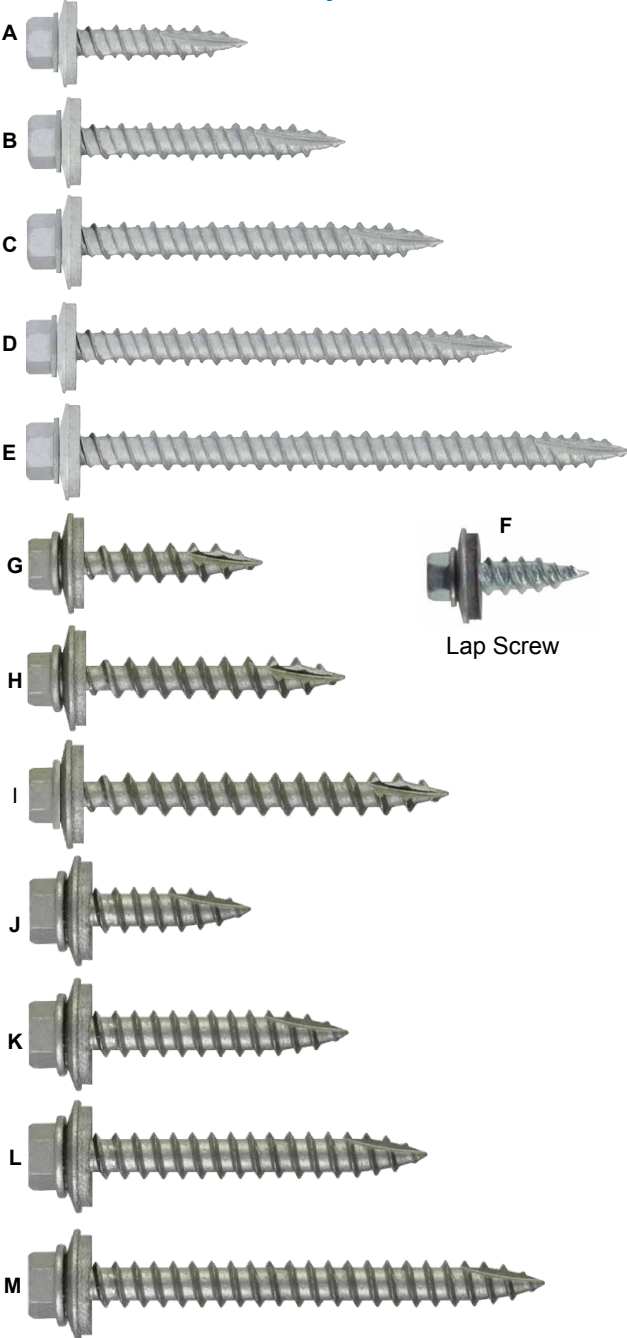

Sizes

	Size	Grip Length	Part #	Box Qty.	Box Wt.
A	#10-14 x 1"	<.250"	10100HW17CSTSBW	3,000	26 lbs.
B	#10-14 x 1-1/2"	<.750"	10150HW17CSTSBW	2,500	28 lbs.
C	#10-14 x 2"	.500" - 1.250"	10200HW17CSTSBW	2,000	22 lbs.
D	#10-14 x 2-1/2"	1.000" - 1.750"	10250HW17CSTSBW	1,500	19 lbs.
E	#10-14 x 3"	1.500" - 2.250"	1030HW17CSTSBW	1,000	15 lbs.
F	#12-14 x 3/4"	LAP	12075HWBSTSBW	2,500	27 lbs.
G	#12-8 x 1"	<.250"	12100HW17CSTABW	3,000	23 lbs.
H	#12-8 x 1-1/2"	<.750"	12150HW17CSTABW	2,500	34 lbs.
I	#12-8 x 2"	.500" - 1.250"	12200HW17CSTABW	2,000	33 lbs.
J	#14-10 x 1"	<.250"	14100HWMCTABW	3,000	43 lbs.
K	#14-10 x 1-1/2"	<.750"	14150HWMCTABW	2,000	38 lbs.
L	#14-10 x 2"	.500" - 1.250"	14200HWMCTABW	1,500	34 lbs.
M	#14-10 x 3"	1.500" - 2.250"	14300HWMCTABW	1,000	32 lbs.

HEX SIZE

#9, #10, #12 = 1/4" hwh

#14 = 5/16" hwh

Point Type: Type 17 | Drilling Thickness: 20ga. Max

Bagged 250 per bag

Paint



All fasteners can be painted with our Kalida-Kote paint finish to your exact color match.

Polyurethane with UV protection provides a chip resistant finish without chalking and fading.

Do you need a long life head or a stainless steel screw?



Please see Page MD36!