

**SUPERIOR CORROSION RESISTANCE & LONG-LIFE PERFORMANCE**



**PANEL-TITE® SCH**  
Stainless Cap Head with Flange Sealer


- Use on 20yr warranty roof systems.
- Carbon steel shank with TRI-SEAL® coating.
- Provides outstanding corrosion protection.



**PANEL-TITE® SS**  
Stainless Steel with Stainless Steel Washer

- 304 stainless steel.
  - Used in aluminum applications.
  - Preferred screw for treated lumber.
- Penetrates Steel up to 20 ga.*

**SIZES**

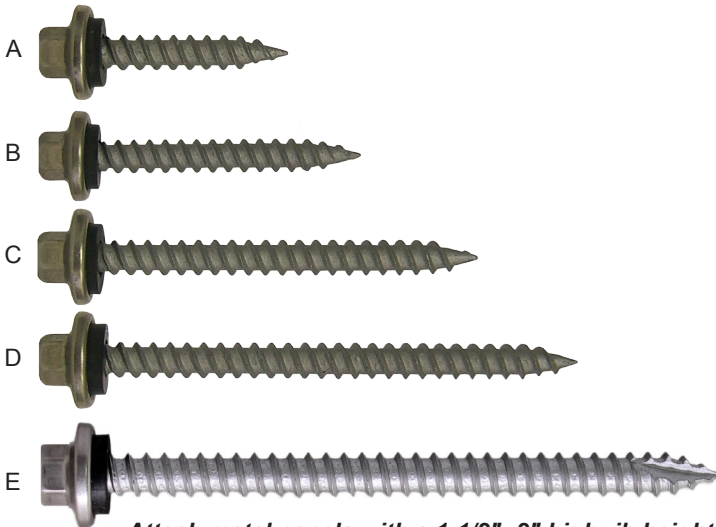


*Attach metal panels with a 1-1/2" - 2" high rib height. Great for replacing screws that are stripped!*

**PANEL-TITE® SCH**  
Stainless Cap Head w/Flange Sealer

	Description	Drilling Thickness	Part No.	Carton Quantity	Box Wt.
A	#10-12 x 1" GP	20ga. max	10100HWGCSTSSC	2,500 pcs.	30 lbs.
B	#10-12 x 1-1/2" GP	20ga. max	10150HWGCSTSSC	2,000 pcs.	25 lbs.
C	#10-12 x 2" GP	20ga. max	10200HWGCSTSSC	2,000 pcs.	33 lbs.
D	#10-12 x 2-1/2" GP	20ga. max	10250HWGCSTSSC	1,000 pcs.	29 lbs.
E	#14-10 x 3-1/2"	20ga. max	14350HW17CSTSSC	1,000 Pcs	38 lbs.

Diameter & Point: #10-12 Gimlet Point  
Material: Carbon Steel Shank, 304 Stainless Steel Cap Head  
Plating: TRI-SEAL™ Coating  
Head Style: 1/4" HWH  
Thread: #10-12 Double Lead  
Salt Spray: 1,000 hrs.

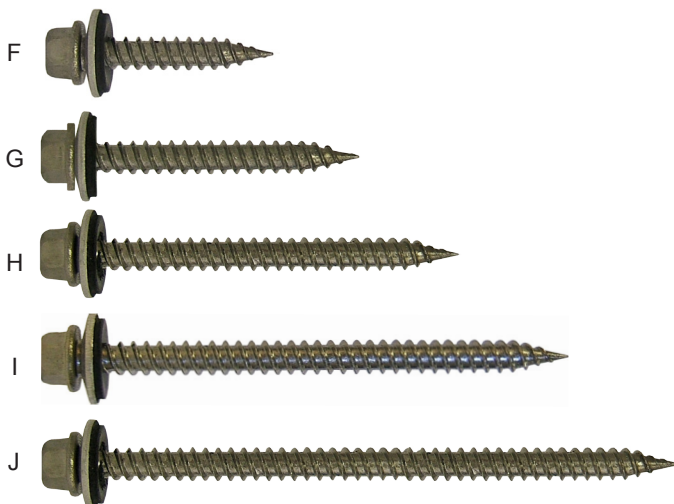

**PANEL-TITE® SS**  
Stainless Steel w/ Stainless Steel Washer

	Description	Drilling Thickness	Part No.	Carton Quantity	Box Wt.
F	#9-15 x 1" GP	.040 AL	09100HWGS34BW	3,000 pcs.	26 lbs.
G	#9-15 x 1-1/2" GP	.040 AL	09150HWGS34BW	2,500 pcs.	26 lbs.
H	#9-15 x 2" GP	.040 AL	09200HWGS34BW	2,000 pcs.	26 lbs.
I	#9-15 x 2-1/2" GP	.040 AL	09250HWGS34BW	1,500 pcs.	25 lbs.
J	#9-15 x 3" GP	.040 AL	09300HWGS34BW	1,000 pcs.	18 lbs.

Diameter & Point: #9-15 Gimlet Point  
Material: 304 Stainless Steel  
Plating: Passivated  
Head Style: 1/4" HWH  
Thread: #9-15 Double Lead

DISCLAIMER: ALL DATA AND SPECIFICATIONS ARE BASED ON LABORATORY TESTS. APPROPRIATE SAFETY FACTORS SHOULD BE USED BY THE USER OR SPECIFIER. DETERMINING THE PROPER FASTENER IS THE RESPONSIBILITY OF THE USER OR SPECIFIER. BECAUSE APPLICATION CONDITIONS VARY, WE ASSUME NO LIABILITY FOR THE USE OF THIS INFORMATION.