


### Designed for Sidewall or Low Profile Applications

#### Applications



Seals on a variety of substrates

- Wall and Roof Penetrations
- Drywall
- Stucco Wall
- Corrugated Metal Siding

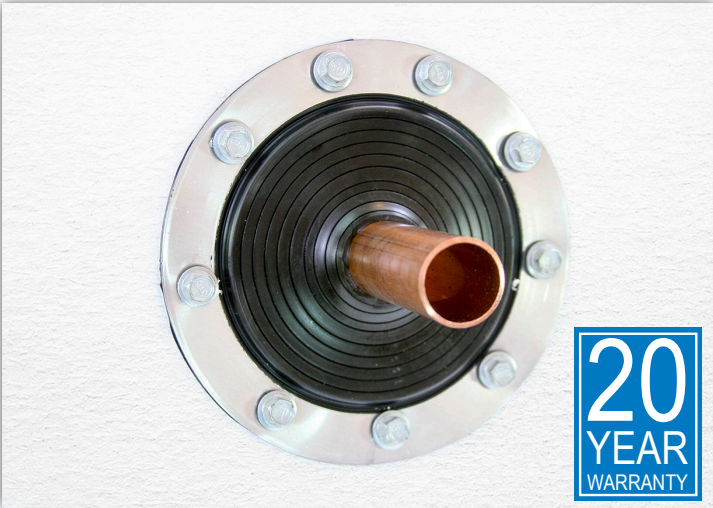

#### Sizes

SIZE PIPE RANGE	COMPOUND	PART#		FLASHING DETAILS		
<b>Low Profile</b> Fits up to 4" Pipes	Black EPDM	LP101BA		A- Top opening diameter	Closed	0" - 4"
	LT Grey EPDM	LP101GA		B- Overall Height		3/8"
	DRK Grey EPDM	LP101NG		C- Base dimensions		6-1/4"
	FDA White Silicone	LP102WT				

#### Standard Materials



#### Colors Available

- Black
- Bright Red
- Brown
- Copper
- Dark Blue
- Dark Green
- Dark Grey
- Light Blue
- Light Green
- Light Grey
- Tan
- Terra Cotta
- White

*\*Call TFC for your specific needs.*

#### Material Properties | EPDM and Silicone

	EPDM 70 hour @ 500 pphm	FDA WHITE SILICONE 70 hour @ 500 pphm
ADVANCED OZONE RESISTANCE tested to...		
HIGH TEMPERATURE RESISTANCE		
Tested to Intermittent	+138°C (+275°F)	+260°C (+500°F)
Tested to Continuous	+100°C (+212°F)	+225°C (+437°F)
LOW TEMPERATURE RESISTANCE tested to...	-55°C (-67°F)	-74°C (-101°F)
COMPRESSION SET Maximum...	25%	50%

EPDM and Silicone provide exceptional weathering protection even in harsh environments.