

KALIDA-KOTE

COLORS



Specifically formulated for
PANEL-TITE® BURR BUSTER®
Metal-to-Wood Screws



- Polyester paint can be matched to any color and is UV resistant!
- Baked on finish provides a tough, chip resistant finish.
- Increases corrosion protection on the threads compared to ordinary sprayed or powder painted heads. Applied over TRI-SEAL® coating.
- Special colors available

KALIDA-KOTE™ DIPPED paint provides extra corrosion protection on the entire screw!

Our special process submerses the entire screw in a proprietary paint bath multiple times, and is then baked to provide a tough finish that is perfectly color matched to your panel.

OVER 40 COLORS!

TFC COLOR NAME	TFC PAINT CODE #	Panel Color Match
Ash Grey	ms25	Ash Grey #25 Metal Sales
Barn Red	ms24	Red #24 Metal Sales
Black	ms06	Black #06 Metal Sales
Brown	ms12	Brown #12 Metal Sales
Burgundy	ms15	Burgundy #15 Metal Sales
Burnished Slate	ms49	Burnished Slate #49 Metal Sales
Charcoal Grey	uc101	Steel Grey Union Corrugated
Crimson Red	mb34	Crimson Red MB34 MBCI
Desert Sand	mb48	Desert Sand MB48 MBCI
Emerald Green	ms66	Classic Green #66 Metal Sales
Fern Green	mb29	Fern Green MB29 MBCI
Forest Green	ms26	Forrest Green #26 Metal Sales
Gallery Blue	mb27	Cobalt Blue MB27 MBCI
Hawaiian Blue	ms70	Hawaiian Blue #70 Metal Sales
Ivory	ms28	Ivory #98 Metal Sales
Light Stone	ms63	Light Stone #63 Metal Sales
Marine Green	ms69	Marine Green #69 Metal Sales
New Ivory	mpiv	New Ivory Metal Panels Inc.
Olde Towne Grey	ww950	Old Towne Grey Whirlwind
Patina Green	ms58	Patina Green #58 Metal Sales
Patriot Red	MS73	Patriot Red #73 Metal Sales
Polar White	ms80	Polar White #80 Metal Sales
Sahara Tan	ms22	Mocha Tan #22 Metal Sales
Terra Cotta	pc39	Terra Cotta PC39 Peterson

PRODUCT INFORMATION

Description: Thermosetting polyester, that is crosslinked with a melamine and a blocked isocyanate that provides exceptional resistance to UV degradation.

PAINT THICKNESS: 0.0008" - .0010"

SALT SPRAY: +2,000-hrs head
(1,500 hrs threads after installation)

PERFORMANCE


- 4H Pencil Hardness
- Excellent Corrosion Resistance
- Excellent UV Resistance
- Excellent Adhesion

Abrasion & ME Abuse	Excellent	Acids	Excellent
Alkalis	Excellent	Color & Glass Retention	Excellent
Humidity	Excellent	Salts	Excellent
Solvents	Very Good	Weather	Excellent

PROCESS

PAINT APPLICATION / DIPPING

PAINT BAKING / CURING

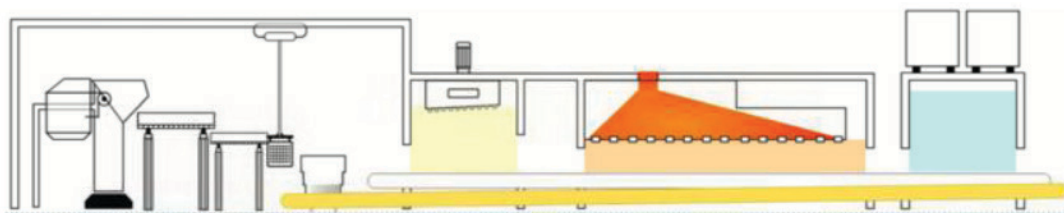

DISCLAIMER: All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. This document is subject to revision. We reserve the right to make technical changes. 03.21-1